


MODEL : NB500

Dynaweld Inverter IGBT MIG/MAG 500 MIG Welding Machine

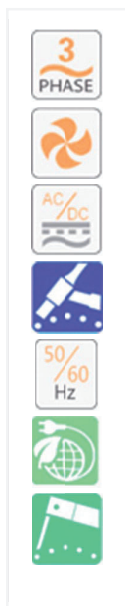

ADVANTAGES

- ✓ Compact Design
- ✓ Microprocessor Control
- ✓ Comprehensive protection function
- ✓ Unique Air Duct Design
- ✓ Unitization design
- ✓ Manufacturing under (CE) Certificate
- ✓ 1 year warranty

Standard Accessory

- Panasonic 500 x 3 meter MIG Torch
- 500amp Welding Earth Clamp with 3 meter welding cable & 500amp cable lug
- Dynaweld 36V Heater CO₂ Gas Regulator with flow meter
- Wire Feeder – 5 meter

Model	NB500	
	MMA	MIG
Input Power Voltage (V)	AC415V±15%, 3PH	
Input Voltage Frequency (Hz)	50/60	
Rated Input Power Capacity (KVA)	25.3	24.6
Rated Input Current (A)	35.2	34.3
No-load Voltage (V)	77	
Output Current Range (A)	40-500	40-500
Rated Output Voltage (V)	40	39
No-load Consumption (W)	60	
Duty Cycle (%)	60	
Pre-flow (s)		0-20
Post-gas (s)		0-20
Burn Back Time (s)		0-20
Efficiency (%)	85	
Power Factor	0.93	
Insulation Class	F	
Protection Class	IP21S	
Weight (KG)	40	
Dimension (mm)	622x280x480	

DYNAWELD SDN BHD 200701004518 (762517-P)

No 12A, Jalan PP 11/5, Alam Perdana Industrial Park,
Taman Putra Perdana, 47130, Puchong, Selangor.

Email : marketing@dynaweld.com.my Website : www.dynaweld.com.my

Tel : +603-8322 7661 Fax : +603-8325 1665