


MODEL : NBM280

Dynaweld 280AMP Inverter Pulse MIG Welding Machine

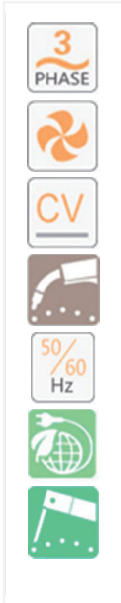

ADVANTAGES

- ✓ Portable function
- ✓ High Duty Cycle (60%)
- ✓ Low energy consumption
- ✓ Less spatter and nice welding seam
- ✓ Manufacturing under (CE) Certificate
- ✓ 1 year warranty

Standard Accessory

- MB36 x 3 meter MIG Torch
- 300amp Welding Earth Clamp with 3 meter welding cable & 35-50mm Dinse Plug
- Dynaweld CO₂ Gas Regulator with flow meter

Model	NBM280	
	MMA	MIG
Input Power Voltage (V)	AC415V±15%, 3PH	
Input Voltage Frequency (Hz)	50/60	
Rated Input Power Capacity (KVA)	11	10
No-load Voltage (V)	67	
Output Current Range (A)	40-280	40-280
No-load Consumption (W)	60	
Duty Cycle (%)	60	
Pre-flow (s)		0-5
Post-gas (s)		0-5
Burn Back Time (s)		0-2
Wire feeder	Bulit in	
Efficiency (%)	85	
Power Factor	0.93	
Insulation Class	F	
Protection Class	IP21S	
Weight (KG)	25	
Dimension (mm)	600x280x450	